




CORD





Automatic machine for multiple creases, supplied with board feeding unit

Machine à rainer automatique pour le refoulement multiple de plats, douée de margeur des cartons

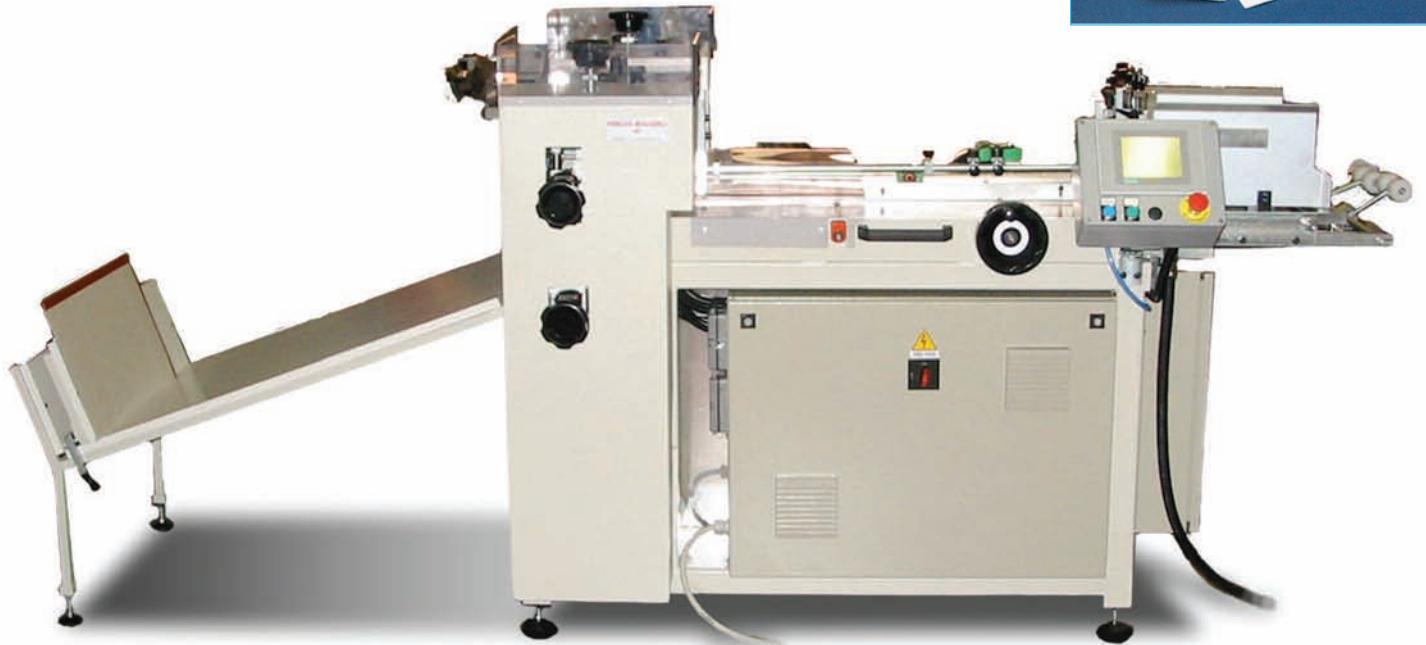

Dynamic process

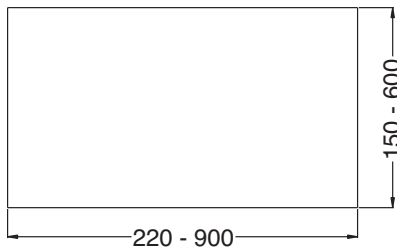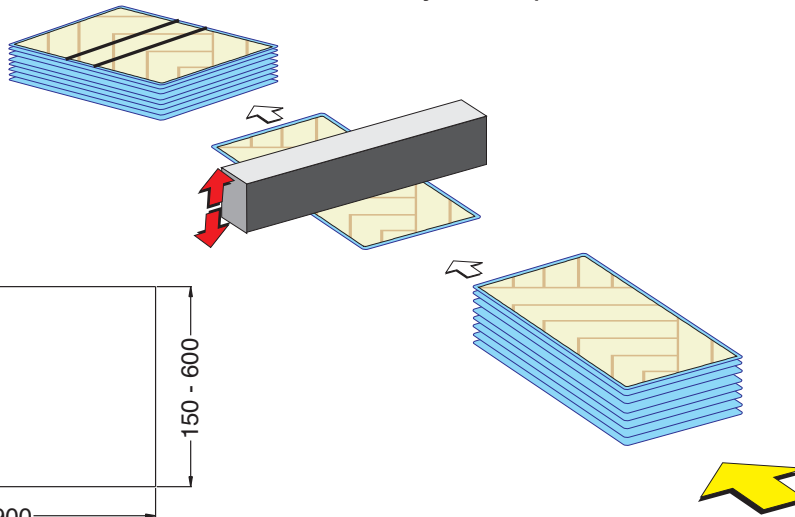

mm



Optional



Material: Coated board, Fiber board or similar
 Cardboard thickness: 1 mm up to 3,5 mm
 Capacity: up to 40 cycles/minute (with 2 creases)*
 Optionals: Soft board blade (min. 200 gr/sqm)
 Heated blade for PP (Thickness min. 0,5 mm)
 Electrical power req.: 3 Kw
 Compressed air: 50 NL/min. (pressure 7 bar)
 Overall dimensions: L=3200 mm W=1210mm H=1350mm

Matériel utilisé: Carton revêtu, Carton fibre ou similaire
Épaisseur carton: de 1 mm à 3,5 mm
*Production: jusqu'à 40 plats (avec 2 rainures)/minute**
Optionals: Lame à sec pour carton fin (min. 200 gr/m²)
Lame à chaud pour polypropylène (Épaisseur min. 0,5 mm)
Puissance électrique: 3 Kw
Consommation pneumatique: 50 NL/minute (7 bar)
Encombrements: L= 3200 mm P=1210 mm H=1350 mm

* Production capacity of every machine depends on sizes, type of materials, glues and operator skill
 Peroni's policy is one of continual product improvement and we can reserve the right to alter design and/or specifications without notice